



SOLID. RELIABLE. SAFE.

# Cart light duty

Mobile solutions for every application



## CART LIGHT DUTY

A roll stand for light applications of up to 14 kg/ 30.9 lbs. All carts are tested and certified as safe before supply. The robust construction makes it a favourite among nursing staff.

### DESIGNED FOR


-  Daily repetitive use
-  Reliability
-  Current regulation (EU) 2017/745 (MDR) & IEC 60601-1 safety standards
-  FDA registered and 510k compliant

### FEATURES

-  Easy to clean
-  No pooling areas for liquids
-  Easy-glide movement
-  Lockable castors for stability
-  Small footprint
-  5-year warranty

### ACCEPTS

-  All standard fixings
-  External power supply holsters
-  Baskets
-  Many other accessories

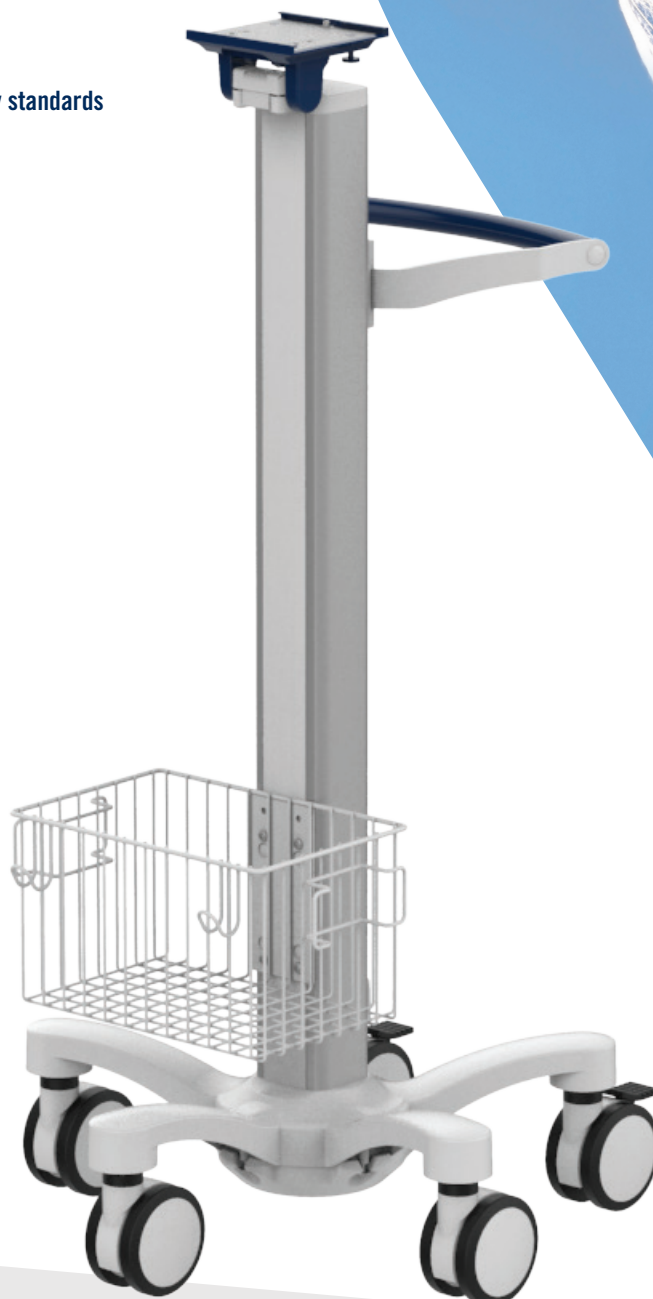

## MONITOR PRESENTATIONS

Which monitor would you like to mount?  
CIM med offers solutions for a wide range of medical device manufacturers.



## ACCESSORIES

A huge variety of accessories is available which you will find in our accessories catalogue.  
Please note that not every accessory is suitable for every cart.





## Cart light duty - for 5" plunge plate applications

**A**

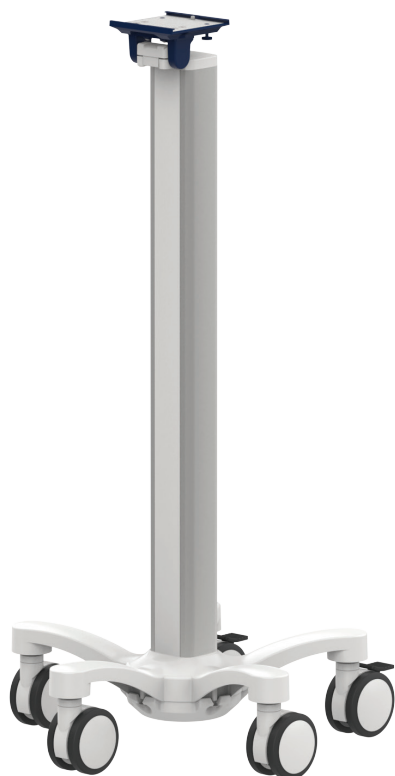


Illustration shown with Dräger Infinity Delta

### Monitor adaption

5" plunge plate with tilt function

### Accessories

5-star aluminum base with counter weight  
double wheel castors, ø 100 mm / 3.9", 2 lockable  
column to accept components and accessories on opposite sides

### Max. load capacity

14 kg / 30.9 lbs

### Optional accessories

see page 3


### Suitable for

- Generic 5" plunge plate solutions
- Dräger monitoring: Infinity Delta
- Fukuda Denshi monitoring: Dynascope DS-8007
- GE monitoring: Procare B20/ B40, GE Carescape B105/ B125/ B450/ B650, V 100/ VC 100
- Mindray monitoring: BeneVision N15/ N17, BeneVision N12/ iMEC/ uMEC/ iPM/ ePM, BeneView T1/ N1/ TDS/ T5/ T8, T9, VS-600, VS-900
- Nihon Kohden monitoring: Life Scope PT BSM 1700/ CMS 1500/ TR BSM 6000, VS BSM 3500/ 3700, Vismo PVM 2700
- Philips monitoring: Efficia CM100/ CM120/ CM150, Sure Signs/ Vital Signs VS2+/ VS1/ VS4

Please note that monitor-specific mounting adapter are required for certain manufacturers.

## Cart light duty - for VESA 75/100 applications

K

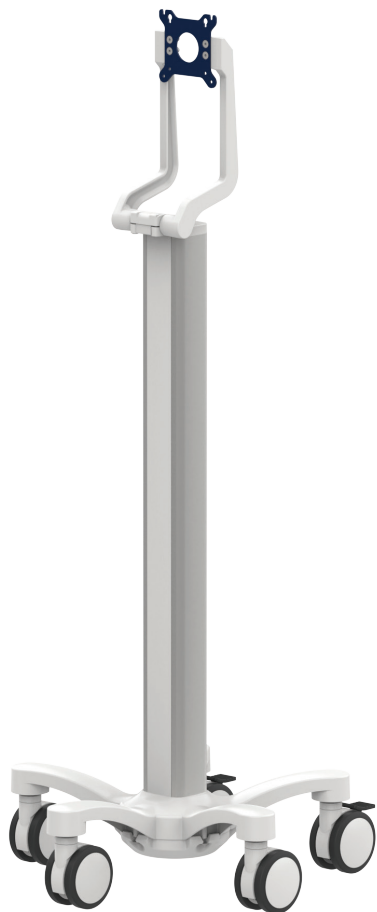

### Monitor adaption

CL-bracket, VESA 75/100

### Accessories

5-star aluminum base with counter weight  
double wheel castors, ø 100 mm / 3.9", 2 lockable  
column to accept components and accessories on opposite sides

### Max. load capacity

10 kg / 22 lbs

### Optional accessories

see page 3


### Suitable for

- Computer hardware with VESA 75/100
- Dräger monitoring: Infinity C500/700, Explorer
- GE monitoring: Carescape B850
- Nihon Kohden monitoring: Life Scope G7/ G9
- Spacelabs monitoring: Xprezzon display

All rear mounted flat panels of various manufacturers.

## Cart light duty - for notebooks

TN

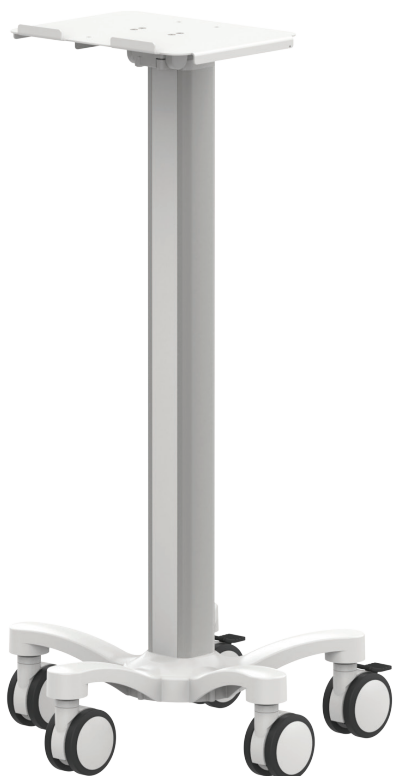

### Monitor adaption

360 x 280 mm / 14.2 x 11", with tilt function

### Accessories

5-star aluminum base without counter weight  
double wheel castors,  $\varnothing$  100 mm / 3.9", 2 lockable  
column to accept components and accessories on opposite sides

### Max. load capacity

7 kg / 15.4 lbs (without counter weight)

### Optional accessories

see page 3