



MOUNTING REFERENCE GUIDE

# Workstations

CIM Cable Integrated Mounting System



# Content

---

<b>General notes / Product highlights</b>	<b>3</b>
<b>How to create part numbers</b>	<b>4</b>
<b>Height adjustable arm for flat panel and keyboard / work surface</b>	<b>6</b>
<b>Extended height adjustable arm for flat panel and keyboard / work surface</b>	<b>8</b>
<b>Fixings</b>	<b>10</b>

## General notes

---

### Monitor Adaptations

The monitor adaptation VESA 75/ 100 is provided with a spring for counter-balance.

### Components' grounding

All arms with integrated cable management are equipped with **component grounding**. No grounding is required for arms with external or semi-integrated cable management with cables not being led through joints.

### Product marking

All CIM products are CE marked. As **medical product risk class 1** they are conform with the regulations (EU) 2017/745 (MDR) and IEC 60601-1, 3rd Edition. The current standard IEC 60601-1 for electrical and mechanical safety is the 3rd Edition. Other standards of the IEC 60601 series are not applicable to our products, regardless of their version.

## Product highlights

---

The height adjustable arm offers **full cable integration**, one-wipe clean surfaces and our **5-year warranty** on the entirety of the product. Vertically and horizontally adjustable, the arm offers optimal positioning of your device. A constant viewing angle when vertically adjusted is guaranteed by a parallel linkage. **Weight-optimized springs counter-balance** the monitor without making any adjustments. Individual rotational stops may be integrated in any joint.

To provide the perfect combination of arm and monitor, the CIM articulated height adjustable arm has a simple quarter-turn lock to hold the arm safely in position when removing the monitor. Furthermore the arm is equipped with the unique safety feature of a slow-release gas spring. Should anybody try to remove the monitor before locking the arm in position, the arm will only rise at a slow and even tempo.

**SAFETY**

# How to create part numbers

Part numbers can be easily created by following the steps below:

Please replace the letters in **green** with the part no. code as per your requirements.

## 1. Components' grounding:

A = grounded

## 2. Choose the arm version required:

431MTW = height adjustable arm with fold-up Z bracket

73130MTW = extended height adjustable arm with fold-up Z bracket

## 3. Specify where you want to mount the arm and select the fixing (Y):

1V = pole ø 23 - 40 mm / 0.9 - 1.6"

1 = pole ø 25 mm / 1.0"

1B = pole ø 30 mm / 1.2"

1F = pole ø 35 mm / 1.4"

1C = pole ø 38 mm / 1.5"

2F = horizontal rails 10 x 25, 8 x 35, 10 x 30, 10 x 50 mm

3 = vertical rail 10 x 25 mm

3DR = dual vertical rails, distance 150 mm/ 5.9"

3TX = dual vertical rails, distance 225 mm/ 8.9"

4V = vertical wall channel

## 4. Choose the colour requested for decorative parts (C):

gr = RAL 7024 (graphite grey)

bl = RAL 5013 (cobalt blue)

## 5. Choose the colour requested for the aluminium die-cast parts (D):

1 = RAL 9016 (traffic white)

2 = RAL 9002 (grey white)

## How to create part numbers

### 6. Specify the spring depending on the weight of your monitor/ device (X):

Please note that the weight range of the individual springs may vary depending on the bracket (X).

#### Pneumatic Springs Explained:

The weight ranges of the pneumatic springs shown in our catalogues relate to the minimum and maximum weights of the products that can be added to the arm, for a perfectly balanced solution. The weight ranges can vary with the same pneumatic springs, as the overall weights placed on the front of the arms have to be considered. The total weight not only reflects the actual monitor weight, but also includes monitor adaptations, brackets and/ or trays. When choosing the pneumatic spring, please consider the weight of your monitor/ device only.

130	=	4 - 8 kg / 8.8 - 17.6 lbs
175	=	9 - 12 kg / 19.8 - 26.5 lbs
220	=	12.5 - 15.5 kg / 27.6 - 34.2 lbs

### 7. Specify the requested size of the keyboard tray and mouse (T):

58W	=	580 x 200 mm / 22.8 x 7.9" with wrist rest
-----	---	--

## Example

01 Grounding		02 Arm version		03 Fixing		04 & 05 Colour		06 Spring tension		07 Keyboard tray
A	-	431MTW	-	Y	.	CD	—	X	—	58W
A	-	431MTW	-	4V	.	gr1	—	130	—	58W



# Height adjustable arm for flat panel and keyboard / work surface



## Monitor / keyboard adaption

VESA 75/100 with fold-up Z-bracket and keyboard / mouse tray with wrist rest

## Height adjustment

slow-flowing spring, parallel linkage for a constant viewing angle

## Colours to choose

decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey  
aluminum parts RAL 9016 traffic white / RAL 9002 grey white

## Max. load capacity support arm

17 kg / 37.5 lbs

## Max. load monitor adaptation

14 kg / 30.9 lbs

## Product weight

8.6 kg / 19 lbs

## Keyboard tray

580 x 200 mm / 22.8 x 7.9"

## Balancing range

1300 N (4 - 8 kg / 8.8 - 17.6 lbs); 1750 N (9 - 12 kg / 19.8 - 26.5 lbs);  
2200 N (12.5 - 15.5 kg / 27.6 - 34.2 lbs)

## Part number

A-431MTW-Y.CD\_X\_58W

## Fixings

Y | details page 10




4V

Adapter for  
vertical wall channel




2F

Fixed rail clamp



3

Vertical rail clamp



3DR  
3TX

Dual vertical rail clamp




1  
1B  
1F  
1C  
1V

Fixed / universal  
pole clamp


# Height adjustable arm for flat panel and keyboard / work surface

## Technical data

### SIDE VIEW

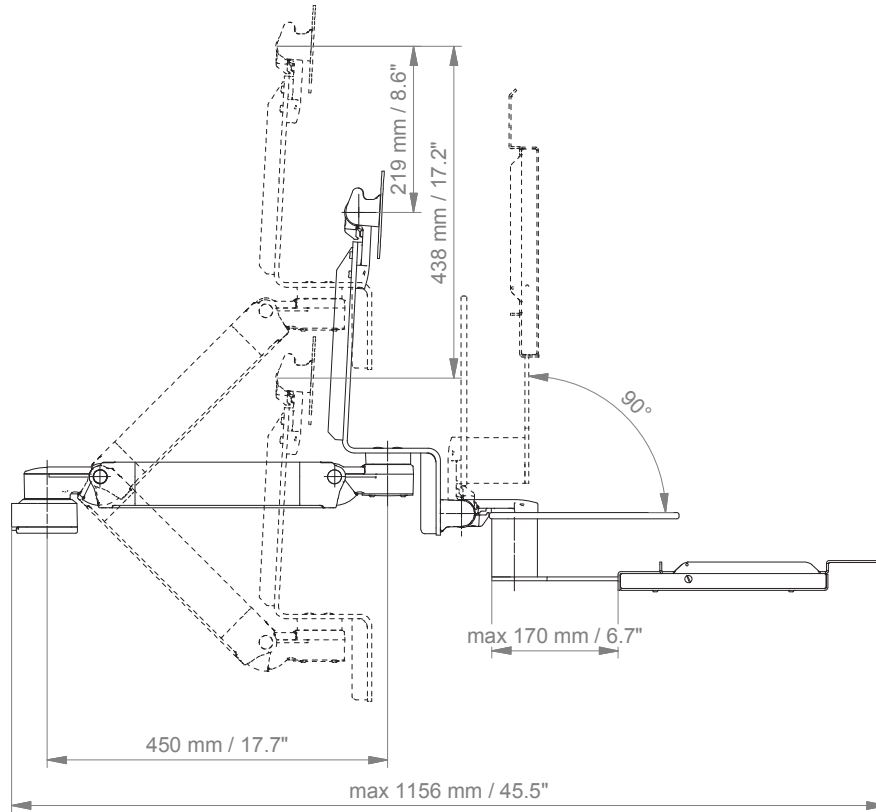

### TOP VIEW

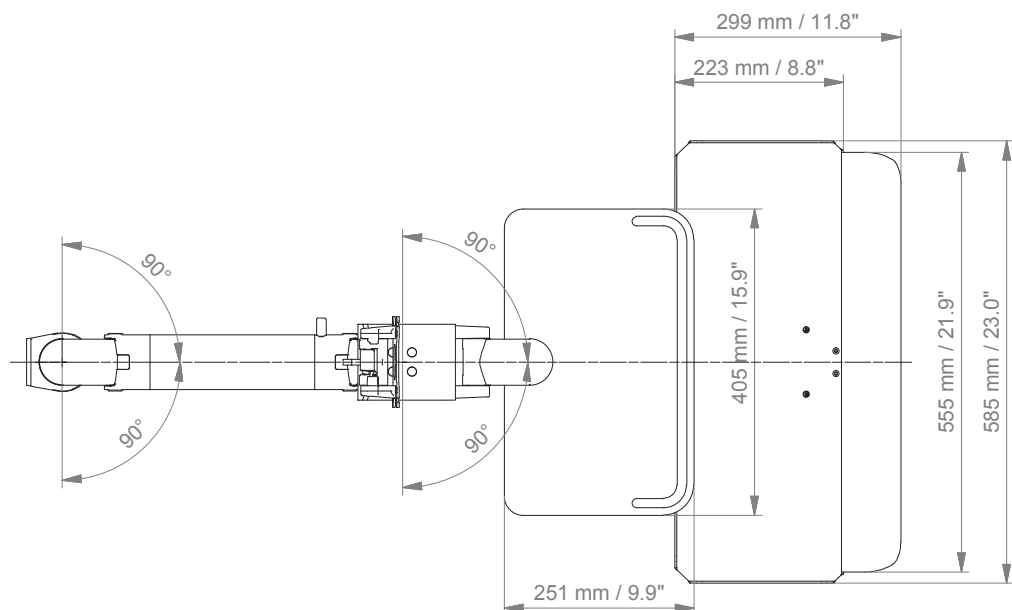

# Extended height adjustable arm for flat panel and keyboard / work surface



## Monitor / keyboard adaption

VESA 75/100 with fold-up Z-bracket and keyboard / mouse tray with wrist rest

## Height adjustment

slow-flowing spring, parallel linkage for a constant viewing angle

## Colours to choose

decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey  
aluminum parts RAL 9016 traffic white / RAL 9002 grey white

## Max. load capacity support arm

17 kg / 37.5 lbs

## Max. load monitor adaptation

14 kg / 30.9 lbs

## Product weight

9.7 kg / 21.4 lbs

## Keyboard tray

580 x 200 mm / 22.8 x 7.9"

## Balancing range

1300 N (4 - 8 kg / 8.8 - 17.6 lbs); 1750 N (9 - 12 kg / 19.8 - 26.5 lbs);  
2200 N (12.5 - 15.5 kg / 27.6 - 34.2 lbs)

## Part number

A-73130MTW-Y.CD\_X\_58W

## Fixings

Y | details page 10




4V

Adapter for  
vertical wall channel



2F

Fixed rail clamp



3

Vertical rail clamp



3DR  
3TX

Dual vertical rail clamp



1  
1B  
1F  
1C  
1V


Fixed / universal  
pole clamp




# Extended height adjustable arm for flat panel and keyboard / work surface

## Technical data

### SIDE VIEW

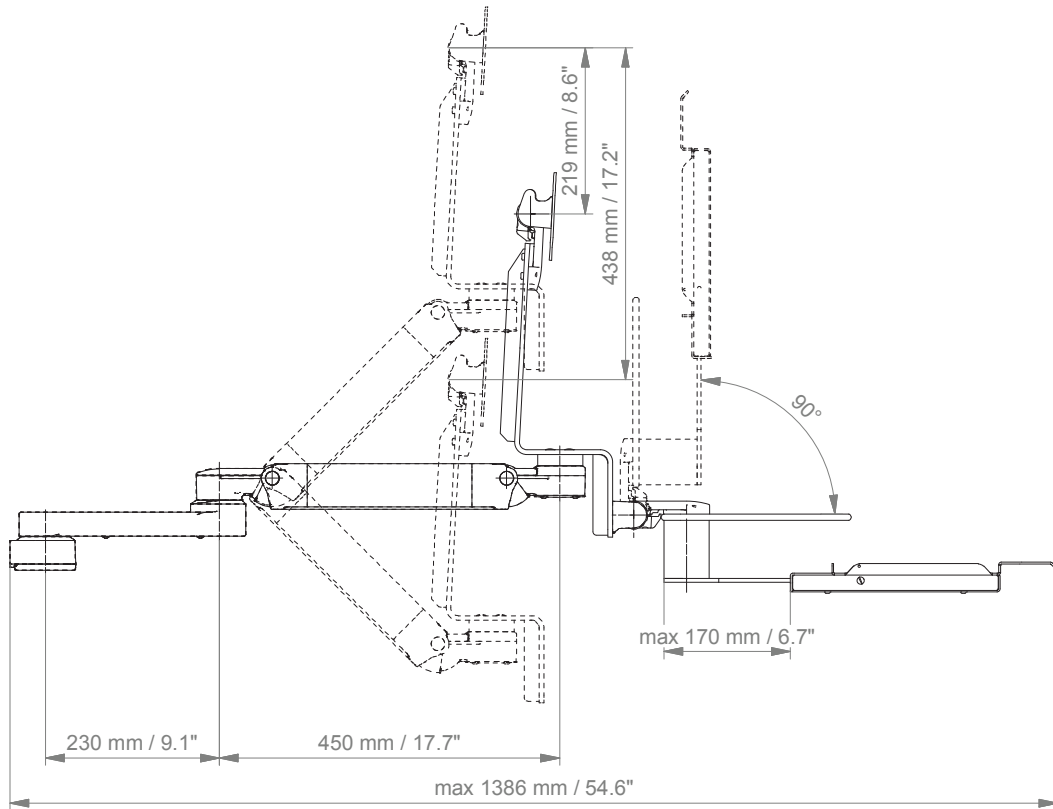



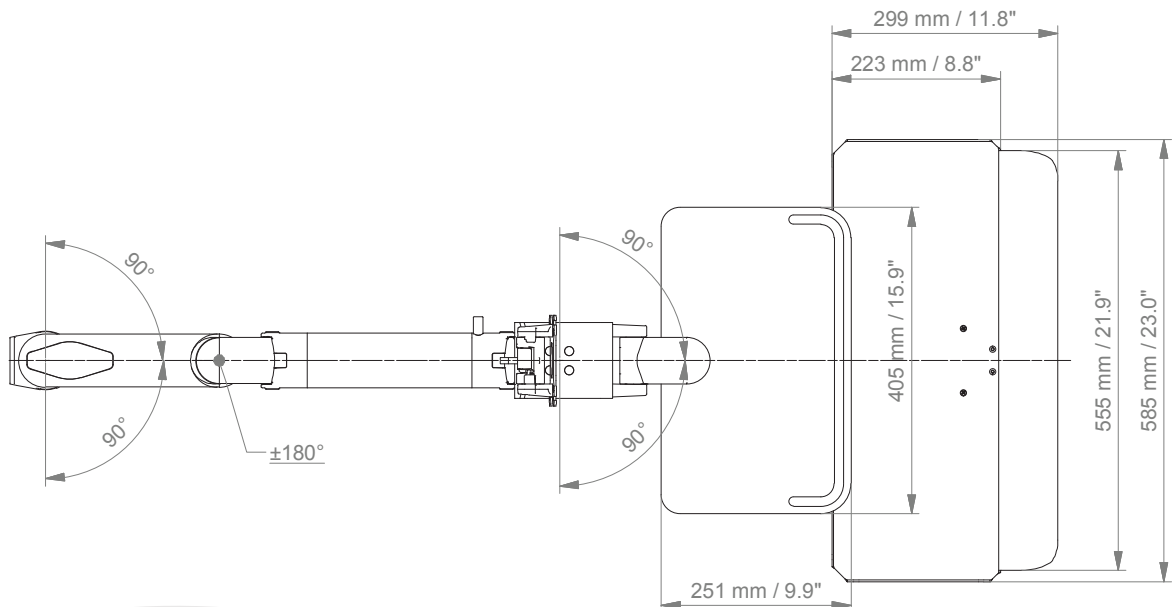




### TOP VIEW



## Fixings



Illustration	Description	Notes	Part no.
	Adapter for vertical wall channel	To mount to CIM wall channel (compatible with GCX channel) Please order separately: CIM wall channel, see catalogue accessoires	4V
	Fixed rail clamp	To mount to horizontal European rails 10 x 25, 8 x 35, 10 x 30, 10 x 50 mm	2F
	Vertical rail clamp	To mount to vertical European rail 10 x 25 mm	3
	Dual vertical rail clamp	To mount to two parallel vertical European rails 10 x 25, 8 x 35, 10 x 30, 10 x 50 mm Distance between rails 150 mm / 5.9", e.g. Dräger pendant Distance between rails 225 mm / 8.9", e.g. Trilux pendant	3DR 3TX
	Fixed pole clamp	To mount to pole ø 25 mm / 1.0" To mount to pole ø 30 mm / 1.2" To mount to pole ø 35 mm / 1.4" To mount to pole ø 38 mm / 1.5"	1 1B 1F 1C
	Universal pole clamp	V-block to mount to pole ø 23 - 40 mm / 0.9 - 1.6"	1V
	Adapter for anaesthesia machines (all suppliers)	H 80 mm / 3.1" With existing side channel	4K



CIM med GmbH

Euro-Industriepark  
Margot-Kalinke-Str. 9  
80939 Munich / Germany

T +49 89. 978 94 08-0  
F +49 89. 978 94 08-29  
M [info@cim-med.com](mailto:info@cim-med.com)

[www.cim-med.com](http://www.cim-med.com)

